

# RTP100H CANopen

## ROTARY ENCODER

Absolute single turn magnetic encoder with shaft



L.4 - DS0038 R02 RTP100H CANopen 09/01/2026



### CHARACTERISTICS

Measuring range 0° to 360°
Redundant sensors
Compact size
Linearity up to $\pm 0.5^\circ$
High protection level and wide temperature range
Anodized aluminum housing



### ADVANTAGES

Hall effect technology
Reliability and long service life
Excellent accuracy
Several connections type available
Highly configurable via CANopen
Firmware upgradable via proprietary bootloader




High protection level




Shock/vibration resistant



Redundant outputs



Reverse polarity protection



Wide temp. range



CANopen output




CANopen Safety



SAE J1939 output



High accuracy



Firmware Upgradable



Directive 2011/65/EU



EU conformity

The company reserves the right to make any kind of design or functional modification at any moment without prior notice.

# RTP100H CANopen

## ROTARY ENCODER

Absolute single turn magnetic encoder with shaft



### PRODUCT DESCRIPTION

RTP100H is a contact-less, magnetic, absolute encoder series featuring high operation speed, intended for harsh environments applications such as high automation and process control.

The contactless technology together with the anodized aluminum housing make this sensor a very robust device with expected life practically infinite thanks to the absence of wear on the sensing element.

Excellent accuracy, high IP rating, shock and vibration resistance and electromagnetic immunity makes this transducer suitable for mobile hydraulic applications such as: agricultural vehicles, earth moving machines, construction equipment, articulated arm cranes and aerial work platforms.



L.4 - DS0038 R02 RTP100H CANopen 09/01/2026



**Agricultural machinery**



**Construction**



**Earth moving**



**Handling and lifting**

# RTP100H CANopen

## ROTARY ENCODER

Absolute single turn magnetic encoder with shaft



### PRODUCT CODE

**ORDER CODE<sup>(1)</sup>** ▶ **RTP100H.** **a** **b** **c** **d** **e** **f** **g** **h**

**a** Counting direction

- 1 ◀ = CH1 & CH2 = CW
- 2 ◀ = CH1 & CH2 = CCW
- 3 ◀ = CH1 = CW, CH2 = CCW
- 4 ◀ = CH1 = CCW, CH2 = CW

**b** Power supply range

- 2 ◀ = 9 ... 30 V DC
- 6 ◀ = 8 ... 36 V DC

**c** Measurement range

- 360 ◀ = 360°

**d** Output type<sup>(2)</sup>

- 6 ◀ = CANopen
- 28 ◀ = CANopen with diagnostics
- 40 ◀ = SAE J1939
- 43 ◀ = CANopen safety

**e** Connections

- 1 ◀ = Male connector M12x5, PUR cable 30cm
- 4 ◀ = Wire connector 5x0.25mm<sup>2</sup> PUR cable 30cm
- 13 ◀ = Overmolded Deutsch DT04-6P, PUR cable 30cm
- 20 ◀ = Overmolded Deutsch DT04-4P, PUR cable 30cm
- 30 ◀ = Molex Micro-Fit 6 poles (cod. 43025-0600) with PUR cable 30cm
- 31 ◀ = Male connector M8x5 molded 90°, PUR cable 15cm code B
- 39 ◀ = PUR cable 60cm with DT04-6P connector to be assembly<sup>(3)</sup>

**f** Type of magnet

- 0 ◀ = Adapter STD

**g** Customization

- X ◀ = None
- ? ◀ = Customization code

**h** Approvals

- 1 ◀ = Standard components<sup>(4)</sup>
- 2 ◀ = SIL2/PLd

(1) Not all combinations can be ordered. Please contact TSM for confirmation before placing an order.

(2) Redundant primary measures, acquired by a single logical unit and published on the CANopen output by one or more PDOs, according to the selected mapping.

(3) The cable is supplied with all the connector pins crimped on the wires but with the housing to be mounted separately after installation

(4) Standard component. It does not constitute a safety component as defined in the Machinery Directive 2006/42/CE.

# RTP100H CANopen

## ROTARY ENCODER

Absolute single turn magnetic encoder with shaft

### TECHNICAL SPECIFICATION

Measuring range	0 ... 360°
Resolution	Default: 0.01° Selectable: 0.01° - 0.1° - 1°
Linearity (Ta = 25°C)	±0.5°
Speed rotation	< 120 rpm
Maximum shaft load	Radial: 20 N Axial: 20 N
Torque	0.05 Nm [starting 0.25 Nm]
Materials	Housing: Anodized aluminum Shaft: Stainless steel AISI316L
Protection class	IP67 (acc. to EN 60529)
Temperature drift	±0.01 °/°C typ.
Temperature range	-40°C ... +85°C
Weight approx.	105 g (version with .13 connection)
Shock resistance	acc. to EN 60068-2-27 50 G, 11 ms, 100 shocks per axis Axis : X, Y, Z
Vibration resistance	acc. to EN 60068-2-6 10 ... 500 Hz, 10g, 2h per axis Axis : X, Y, Z


### ELECTRICAL CHARACTERISTICS

Power supply range	See order code
Consumption typ.	36 mA (12 VDC, w/o load) 18 mA (24 VDC, w/o load)
Startup time	< 1.5 s
Interface	See order code
CANopen profile conformity	CiA DS301
Electromagnetic compatibility	acc. to EN 61326-1, EN 61326-3-1
EU Conformity	EMC directive 2014/30/EU RoHS directive 2011/65/EU + 2015/863/EU

### OPERATING PRINCIPLE

#### Hall effect

Bases its operation principle on the generation of a voltage across an electrical conductor when a magnetic field is applied in a direction perpendicular to the current flow. An hall-effect rotary sensor gives the absolute angular position of a small rotating dipole magnet above the device surface (end of shaft magnet).

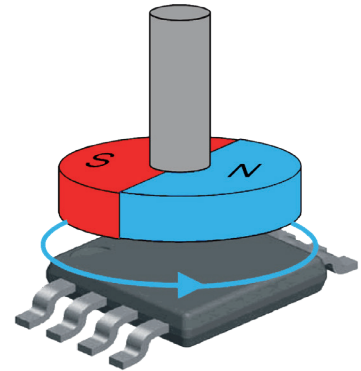


# RTP100H CANopen

## ROTARY ENCODER

Absolute single turn magnetic encoder with shaft

### 1) ELECTRICAL CONNECTION M12 X 5 PINS



**Pinout**

1	GND*
2	+Vin
3	CAN-GND*
4	CAN-H
5	CAN-L

\* GND and CAN\_GND terminals are internally connected to each other and identical in their function

### 4) ELECTRICAL CONNECTION WIRE CONECTOR




**Pinout**

<b>Brown</b>	GND*
<b>White</b>	+Vin
<b>Blue</b>	CAN-GND*
<b>Black</b>	CAN-H
<b>Grey</b>	CAN-L


\* GND and CAN\_GND terminals are internally connected to each other and identical in their function

### 13 & 39] ELECTRICAL CONNECTION DEUTSCH DT04-6P



	Pinout	Colors
1	GND	Blue
2	+Vin	White
3	n.c.	n.c.
4	n.c.	n.c.
5	CAN-L	Brown
6	CAN-H	Black


### 20] ELECTRICAL CONNECTION DEUTSCH DT04-4P



**Pinout**

1	CAN-L
2	CAN-H
3	+Vin
4	GND

### 31] ELECTRICAL CONNECTION M8 X 5 PINS




**Pinout**

	Connector	Accessory
1	CAN-GND*	Brown
2	+Vin	White
3	GND*	Blue
4	CAN H	Black
5	CAN-L	Gray

\* GND and CAN\_GND terminals are internally connected to each other and identical in their function

### 30] ELECTRICAL CONNECTION MICROFIT 6 PINS



CONNECTOR SIDE

	Pinout	Colors
1	GND	White
2	+Vin	Blue
3	CAN H	Grey
4	CAN-L	Brown
5	n.c.	Black
6	n.c.	n.c.



# RTP100H CANopen

## ROTARY ENCODER


Absolute single turn magnetic encoder with shaft



### COUNTING DIRECTION (BOTTOM VIEW)

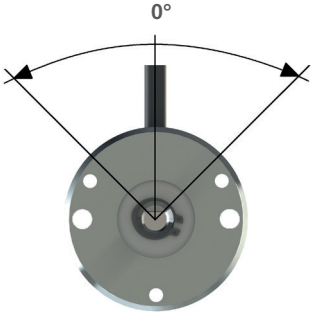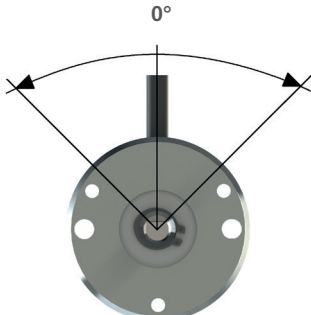1]	CH1 & CH2 = CW	2]	CH1 & CH2 = CCW
CH1: 315° CH2: 315°		CH1: 45° CH2: 45°	CH1: 315° CH2: 315°
CH1: 315° CH2: 45°		CH1: 45° CH2: 315°	CH1: 315° CH2: 45°

### ZERO POSITION

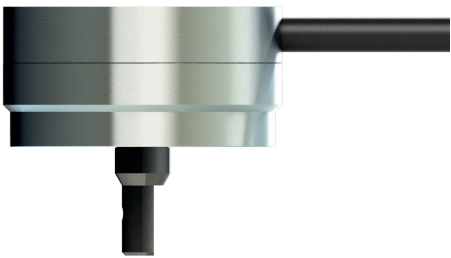


L.4 - DS0038 R02 RTP100H CANopen 09/01/2026

# RTP100H CANopen

## ROTARY ENCODER

Absolute single turn magnetic encoder with shaft

### DIMENSIONS [mm]

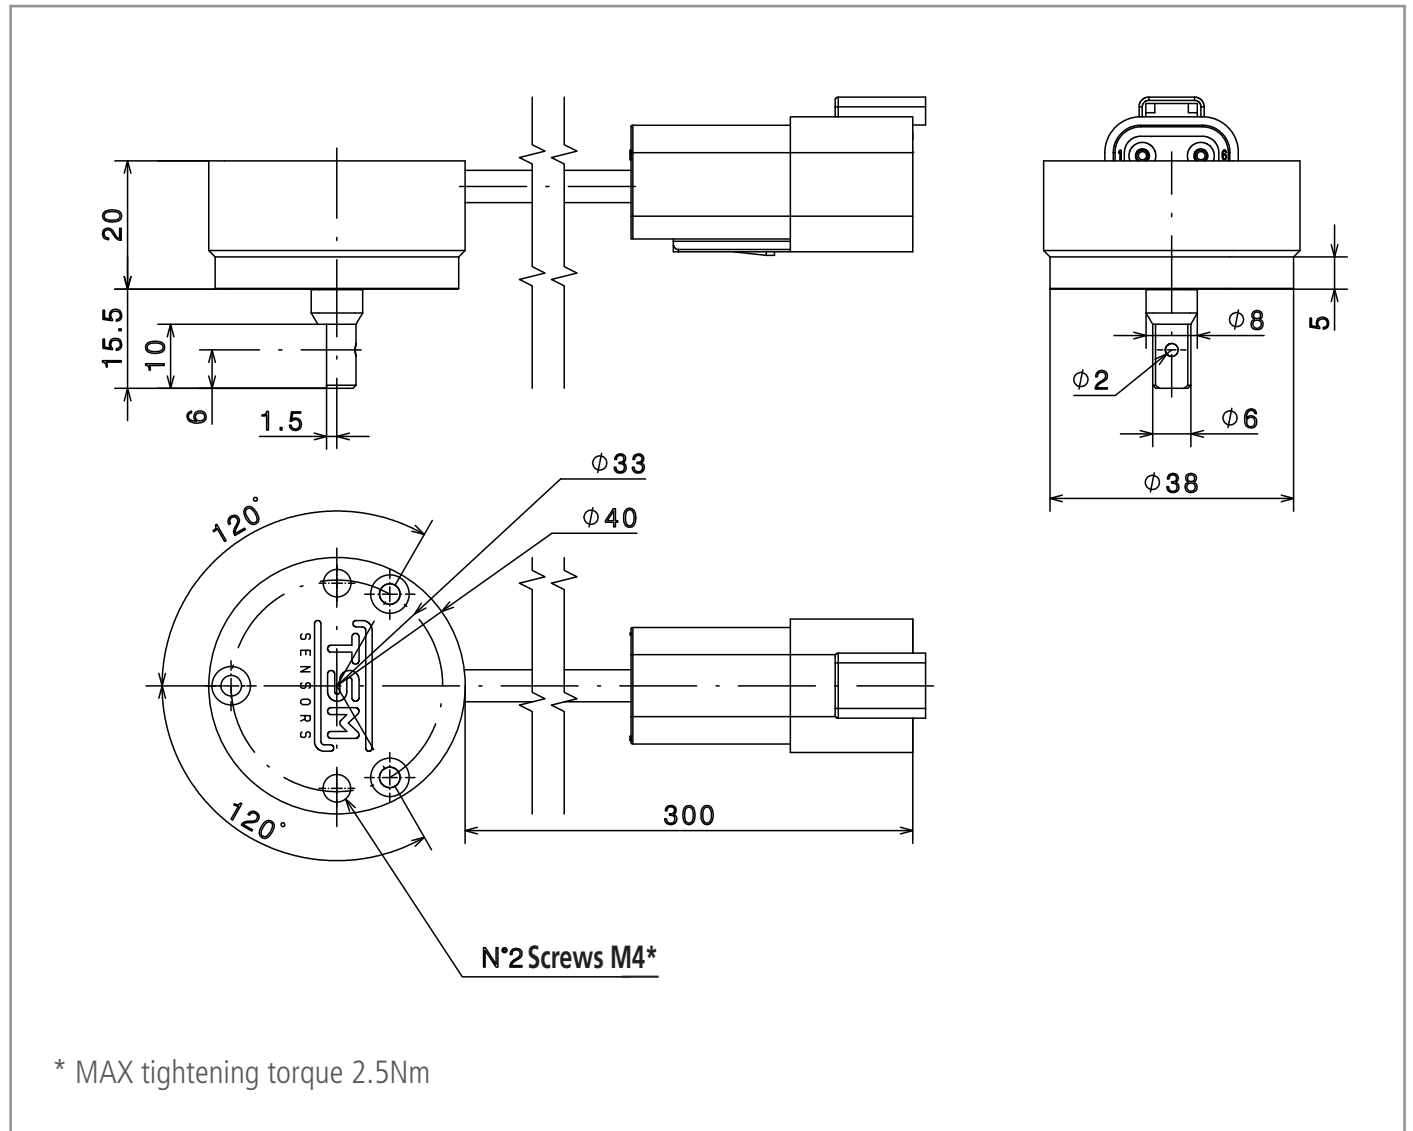

\* MAX tightening torque 2.5Nm